
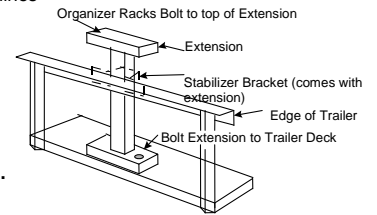


Open Trailer & Utility Vehicle Line Trimmer Rack Instructions

Mounting on open Trailers:


1. **Using a Utility Knife Strip the Vinyl Coating off the base plate** so you will be bolting steel to steel. (Figure 2)
2. Drill 3/8 mounting holes directly over an upright support and bolt the rack on.
3. If the sides of your trailer aren't strong enough use an extension & support off the floor. (Figure 1)
4. The LC015 (5 Place Line Trimmer Rack) needs to be spaced 3 feet apart

Cut vinyl as shown by dotted lines



Mounting to Utility Vehicles:

1. **Using a Utility Knife Strip the Vinyl Coating off the base plate** so you will be bolting steel to steel.
2. Attach one of the Bed Rail bracket set (Part #EE082) to the bottom of the Hand Tool Rack.
3. Attach the Bed Rail Bracket to the Bed Rail.



Required Tools: (2) 9/16" wrenches or (2) 14mm wrenches.

Warning All Green Touch Locks are Keyed alike!!

Customer Service: (800) 621-6919

www.greentouch.com